


Tri-rated Cable to BS6231

Application and Description

Tri-rated Cable to BS6231 Cable panel wiring is a high temperature, flame retardant cable designed for use in the switch control, relay and instrumentation panels of power switchgear and for purposes such as internal connectors in rectifier equipment, motor starters and controllers. Tri-rated Cable to BS6231 Cable is sometimes referred to as BS6231 Cable or Panel Wire.

Cable Construction

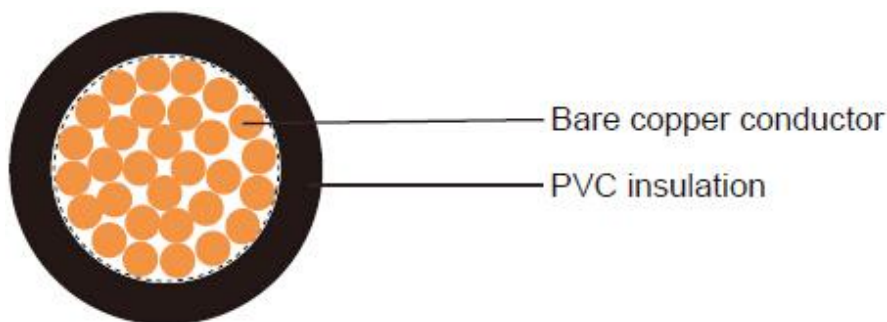

Fine bare copper strands
 Stranding to IEC 60228 CL-5
 PVC TI1(for type BK), TI3 (for type CK) core insulation

Core Identification

Black, Blue, Brown, Red, White, Yellow, Grey, Violet, Pink, Green/Yellow, Other colours are available on request

Technical Characteristics

Working voltage: 600/1000v
 Minimum bending radius: 6xOverall diameter
 Operating temperature: 0° C to +70° C(for type BK)
 0° C to +90° C(for type CK)
 Flame retardant: IEC 60332.1
 Insulation resistance: 20 MΩxkm

Cable Parameter

AWG (No of Strands/ Strand Diameter)	No. of Cores x Nominal Cross Sectional Area #xmm ²	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
20(16/32)	1x0.5	0.80	2.50	12
18(24/32)	1x0.75	0.80	2.70	15
17(32/32)	1x1	0.80	2.95	18
16(30/30)	1x1.5	0.80	3.20	23
14(50/30)	1x2.5	0.80	3.65	34
12(56/28)	1x4	0.80	4.20	48
10(84/28)	1x6	0.80	4.70	67

8(80/26)	1x10	1.14	6.50	119
6(128/26)	1x16	1.52	8.00	187
4(200/26)	1x25	1.52	9.40	291
2(280/26)	1x35	1.52	10.60	406
1(400/26)	1x50	2.02	12.90	580
2/0(356/24)	1x70	2.02	14.60	780
3/0(485/24)	1x95	2.02	16.10	1055
4/0(614/24)	1x120	2.02	17.90	1175
300 MCM (765/24)	1x150	2.41	20.20	1425
350 MCM (944/24)	1x185	2.41	22.85	1735
500MCM(1225/24)	1x240	2.41	24.40	2310