


## 35KV three-core intermediate connection

It is applicable to 26/35kv 3 cores PVC and XLPE power termination kit and intermediate joint, with good electrical and mechanical properties.

### Model implication

□ LS □ - □ / □ □

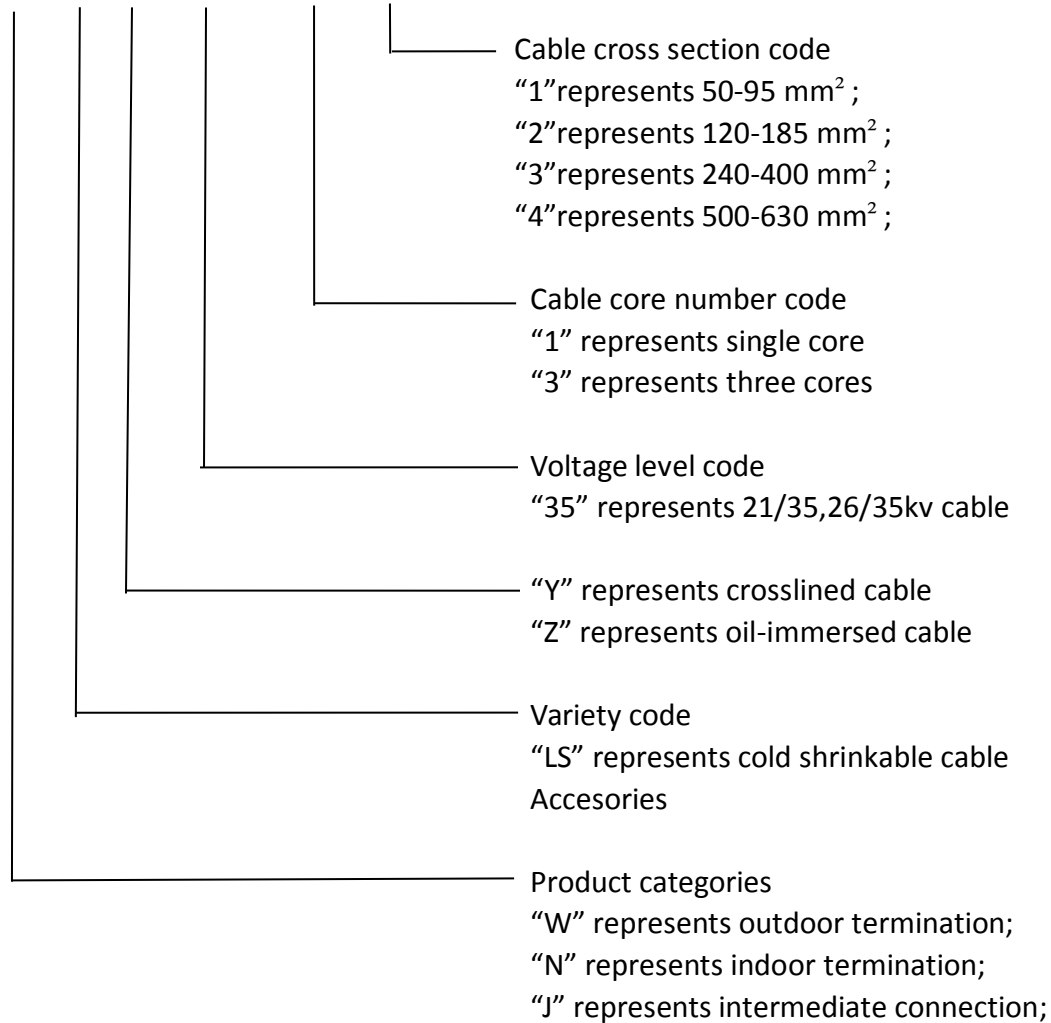

## Technical Data

No.	Items	Requirements	
1	DC withstand voltage test	156kv 15 min	
2	Partial discharge test	$\leq 10P_c$ (1.7U <sub>0</sub> )	
3	Impulse voltage test	250kv 1.2/50 $\mu$ s *10times	
4	Power frequency withstand voltage test	78kv 4h	
5	Humid condition power frequency withstand voltage test (outdoor)	105kv 1min	
6	Dry condition power frequency withstand voltage test (indoor)	105kv 1min	
7	Main cold shrinkable material	Shore hardness(A)	45 $\pm$ 3
8		Tensile strength (Mpa)	$\geq 14$
9		Permanent distortion ratio	$\leq 5\%$
10	Insulation tubing	Volume resistivity ( $\Omega$ .cm)	$\geq 1 \times 10^{14}$
11		Breakdown strength(kv/mm)	$\geq 23$
12	Heat shrinkable stress control tube	Dielectric constant( $\epsilon$ )	$\approx 25$

## Product



## Specification

Product Name	Model	Cable cross section(mm <sup>2</sup> )
35KV three-core intermediate connection	JLSY-35/3.1	50-95
	JLSY-35/3.2	120-185
	JLSY-35/3.3	240-400
	JLSY-35/3.4	500-630